


TECHNICAL DATA SHEET

TK LINEN OPTIC MATT

TK LINEN OPTIC MATT is a bioriented polypropylene film, with a special linen matte effect coating on one side. The other side is adhesive coated, suitable for paper and cardboard thermal lamination.

This film is not suitable to come into direct contact with food.

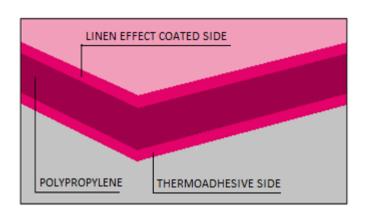

TYPICAL TECHNICAL FEATURES (1)

PHYSICAL PROPERTIES	METHOD	UNIT	VALUE code 644/22
Thickness	Internal	μm	32
Grammage	ASTM D792	g/m²	24,5

THERMAL PROPERTIES		METHOD	UNIT	VALUE code 644/22
Lamination temperature	adhesive side	Internal	°C	95 - 115 ^(†)

^(†) variable according to the processing conditions

OPTICAL PROPERTIES		METHOD	UNIT	VALUE code 644/22
Gloss	60°	Internal	GU	4 - 6

STORAGE

Store the material in a dry location (preferably with RH < 50%) at a constant temperature between 10°C and 30°C. Do not leave it exposed to direct sunlight or atmospheric agents.

Partially used reels have to be repacked as originally supplied.

WARRANTY

Material processability is guaranteed up to 6 months since shipment date, as long as it is stored correctly. It is recommended to condition the material at room temperature at least 24 hours before its use.

e-mail: info@ultralen.com web: www.ultralen.com

⁽¹⁾ The information and data contained herein are to be used only as a guideline; therefore, ULTRALEN FILM GmbH doesn't offer any guarantee on their absolute truthfulness and doesn't accept any liability arising out of their use.



DISCLAIMERS

ULTRALEN FILM GmbH gives no warranty, expressed or implied, as to the suitability of the material for a specific application or characteristic use. An industrial homologation test of the material in actual conditions of purpose is always needed in order to verify its suitability for the specific application or characteristic use.

Before using the material, it is advisable to check the compatibility of the inks and adhesives to be purposed with the type and level of its treatment.

e-mail: info@ultralen.com web: www.ultralen.com