


TECHNICAL DATA SHEET

TK35 ACETATE MATT

TK35 ACETATE MATT is a cellulose acetate film with one matt side and the other thermoadhesive specifically designed for thermal lamination with paper and cardboard.

This film is suitable to come into contact with food (declaration on request).

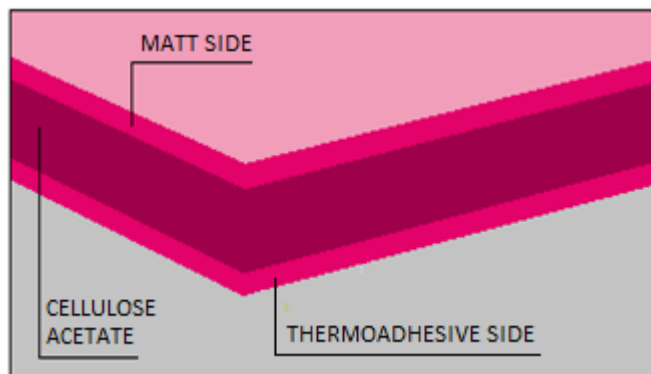

TYPICAL TECHNICAL FEATURES ⁽¹⁾

PHYSICAL PROPERTIES		METHOD	UNIT	VALUE code 911/61
Thickness		Internal	µm	35
Grammage		Internal	g/m ²	39,20
COF	dynamic	Internal	-	0,35 - 0,55
Surface tension		Internal	dyne/cm	38 - 42

MECHANICAL PROPERTIES		METHOD	UNIT	VALUE code 911/61
Tensile strength at break	MD	ASTM D882	N/mm ²	50 - 60
Elongation at break	MD	ASTM D882	%	25 - 45

THERMAL PROPERTIES		METHOD	UNIT	VALUE code 911/61
Thermal shrinkage (115°C/10min)	MD	Internal	%	1,0 - 1,5

CHEMICAL PROPERTIES			METHOD
- Very low resistance to esters - Low resistance to ketons - Moderate resistance to concentrated strong acids and bases - Resistance to non-polar solvents			ASTM D543-87

STORAGE

Store the material in a dry location (preferably with RH ≅ 45%) at a constant temperature between 15°C and 25°C. Do not leave it exposed to direct sunlight or atmospheric agents. Partially used reels have to be repacked as originally supplied.

⁽¹⁾ The information and data contained herein are to be used only as a guideline; therefore, ULTRALEN FILM GmbH doesn't offer any guarantee on their absolute truthfulness and doesn't accept any liability arising out of their use.

ULTRALEN FILM GmbH

LUSTGARTENSTRASSE, 6 - 79576 WEIL AM RHEIN - DEUTSCHLAND

USt.ID: DE229822516

Tel.: (0049) 76214223880 Fax: (0049) 76214223839

e-mail: info@ultralen.com web: www.ultralen.com



WARRANTY

Material processability is guaranteed up to 6 months since shipment date, as long as it is stored correctly. It is recommended to condition the material at room temperature at least 24 hours before its use.

DISCLAIMERS

ULTRALEN FILM GmbH gives no warranty, expressed or implied, as to the suitability of the material for a specific application or characteristic use. An industrial homologation test of the material in actual conditions of purpose is always needed in order to verify its suitability for the specific application or characteristic use.

Before using the material, it is advisable to check the compatibility of the inks and adhesives to be purposed with the type and level of its treatment.

ULTRALEN FILM GmbH

LUSTGARTENSTRASSE, 6 - 79576 WEIL AM RHEIN - DEUTSCHLAND

USt.ID: DE229822516

Tel.: (0049) 76214223880 Fax: (0049) 76214223839

e-mail: info@ultralen.com web: www.ultralen.com